



Compact Thermoplastic, Fully Aimable LED Emergency Unit

KEY FEATURES

ILLUMINATION:

- Long life, efficient, ultra bright white LED lamp heads
- 1W (8 LEDs x 0.125 watts) per head
- High performance, chrome-plated metallized reflector and plastic lens for optimal light distribution
- Two adjustable LED lamp heads provide optimal center-to-center spacing

ELECTRICAL:

- Dual 120/277VAC standard. Optional special voltage 208/220/240VAC available
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 3.6V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING:

- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections
- Top and side knockout for conduit applications
- Suitable for wall or ceiling mount

HOUSING:


- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish



WARRANTY / LISTING:

- *5 year warranty on all electronics and housing. Battery pro rated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations (32°F–122°F)

DIMENSIONS:

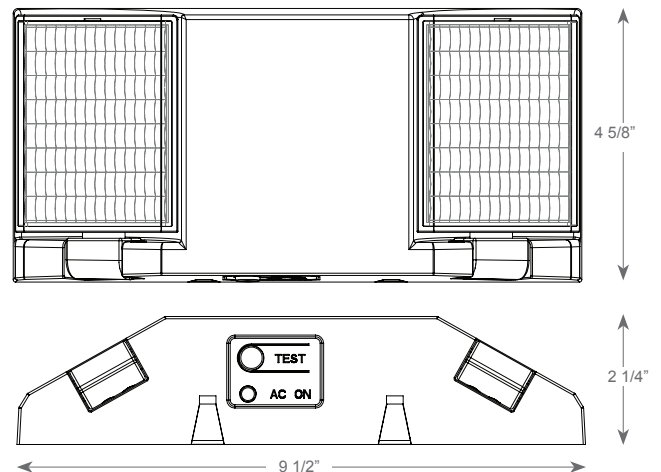

ORDERING INFORMATION

Example: "CEM-B"

MODEL	HOUSING COLOR	
CEM	W	White
	B	Black

Specification is subject to change.

*Warranty does not apply to installation errors, natural disasters, and/or abuse.

