

Thermoplastic Traditional LED Combo Unit



KEY FEATURES

ILLUMINATION:

- · Long lasting, efficient ultra bright white LED lamp heads
- 1W (8 LEDs x 0.125W) per head
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution
- Adjustable LED lamp heads provides optimal center to center spacing. Optional high lumen output heads are available for increased center-to-center spacing
- Long life, energy efficient Red or Green LEDs EXIT sign illumination

ELECTRICAL:

- Dual 120/277VAC
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 9.6V Long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING:

- · Mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish
- Snap-out chevron directional indicators


OPTIONS:

- HL: 12-LED heads provide increased center-to-center spacing (1.5W per head)
- SD: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- RC: Remote capacity up to 3 watts; compatible with LED remote lamp heads (LRH Series)

WARRANTY / LISTING:

- *5 year warranty on all electronics and housing Battery pro rated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations (32°F–104°F)

DIMENSIONS:

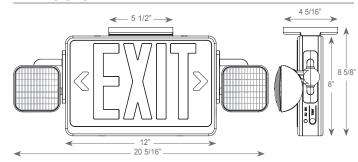

ORDERING INFORMATION

Example: "TC-1R-B-HL-SD"

MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		OPTIONS	
TC	1 Single Face	R	Red	W	White	RC	Remote Capacity	
	2 Universal Single/Double	G	Green	В	Black	HL	High Lumen	
,	•			-		SD	Self-diagnostics	

Specification is subject to change.

