



Die Cast Aluminum Exit Sign



KEY FEATURES

ILLUMINATION:

- Ultra bright, energy efficient, Red or Green LEDs

ELECTRICAL:

- Dual 120/277VAC
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing
- 4.8V maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING:

- Aluminum mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

HOUSING:

- Premium-grade, aluminum housing (also available in black or white powder-coated finishes)
- Field selectable knockout chevron directional indicators
- Unique design allows double face conversion in the field
- Quick-snap face plate closure


WARRANTY/LISTING:

- *5 year warranty on all electronics and housing. Battery pro rated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations (32°F–122°F)

OPTIONS:

- **TRH:** Tamper-resistant hardware helps prevent unauthorized access to the unit
- **SD:** Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- **2C:** Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time
- **RC:** Remote capacity of 2 watts, compatible with LRH-1 or LRH-1-WP remote lamp
- **USA:** Substantial transformation assembly in the U.S. complies with “Assembled in the USA” under the Buy American Act

DIMENSIONS:

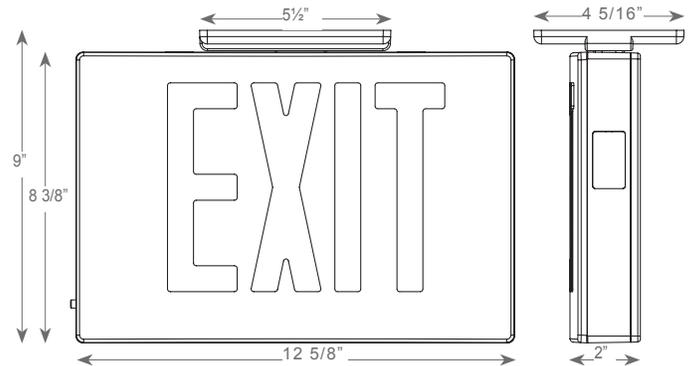

ORDERING INFORMATION

Example: “ED-3R-N-WA-USA-RC”

MODEL	No. of FACES	LETTER COLOR	BATTERY	HOUSING COLOR	FACE COLOR	OPTIONS
ED	1	Single Face	R Red	A AC Only	W White	SD ¹ Self-diagnostics
	2	Double Face	G Green	N NiCad Battery	B Black	2C ² Dual Circuit Operation
	3	Universal Single/Double Face			A Aluminum	TRH Tamper Resistant Hardware
						RC Remote Capable
						USA Assembled in USA

NOTES:

1. Available on NiCad exits only.
2. Available on AC only exits.

Specification is subject to change.

*Warranty does not apply to installation errors, natural disasters, and/or abuse.

